



EUROPLEX® Films for Microfluidic Applications

Product Characteristics

High transmission

EUROPLEX® COC Films for microfluidic applications provide excellent light transmission and brilliance due to a low intrinsic absorption (Figure 1).

Chemical resistance

EUROPLEX® COC Films exhibit outstanding chemical resistance for a variety of solvents, e.g. acetone, ethanol, isopropanol, ethyl acetate, as well as very good acid and base resistance.

Thermal stability

Two types of EUROPLEX® COC Films are available with glass transition temperatures of 78 °C and 142 °C, respectively. This helps customers to realize applications with various requirements in thermal stability.

Biocompatibility

With regard to the composition, the applied COC polymer material complies with the regulations of the European Pharmacopoeia, Monograph 3.1.3. "Polyolefines".

Processability

EUROPLEX® COC Films can be easily processed by laser cutting and laser welding.

Bonding-process

The following bonding-processes are suitable:

- Laser welding
- Thermal bonding
- Solvent bonding, e.g. using cyclohexane or toluene
- Ultra sonic welding

Service

Cleanroom conditions

An important point for microfluidic devices: POLYVANTIS has the possibility to produce under clean-room conditions.

Masking films

Masking films are typically applied on both sides but can be adapted per customer's needs.

In-house cutting

In-house cutting allows customers to have their individual requirements met. The customer receives an all-in-one quality product and service.



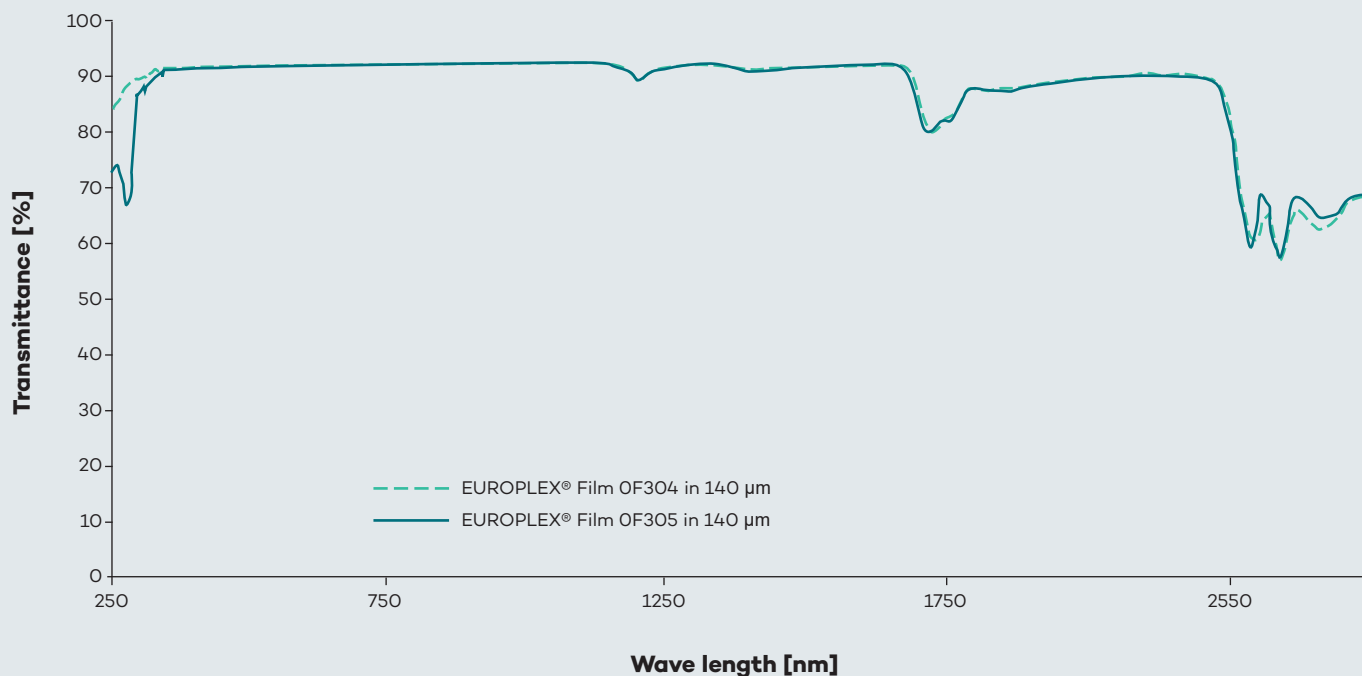


Figure 1: Transmittance as a function of wave length of EUROPLEX® COC films for microfluidic applications.

Technical data EUROPLEX® Film OF304						
Properties	Test method	Unit	Values, chill roll			
Thickness		µm	80	125	140	240
Light transmittance (D65/10°)	ISO 13468-2	%	91	91	91	91
UV transmittance (280 – 380)	ISO EN 410	%	90.6	90.4	90.2	89.8
Haze (@23°C)	ASTM D1003	%	0.3	0.3	0.3	0.4
Refractive index (@23°C)	ISO 489		1.53	1.53	1.53	1.53
Glass transition temperature T_g (10 K/min)	ISO 11357	°C	78	78	78	78
Max. water absorption (@23 °C)	ISO 62	%	0.01	0.01	0.01	0.01
Surface energy (@23 °C)	AN-SOP 1827	mN/m	35.2	35.2	35.2	35.2
Tensile strength	ISO 527-3	MPa	50	52.5	55	57
Nom. strain at break	ISO 527-3	%	11	6.6	4.5	4.5
Tensile stress at break	ISO 527-3	MPa	49	48	48	48
Specific gravity	IOS 1183	g/cm ³	1.01	1.01	1.01	1.01



Technical data EUROPLEX® Film OF305

Properties	Test method	Unit	Values, chill roll			
Thickness		µm	80	125	140	240
Light transmittance (D65/10°)	ISO 13468-2	%	91	91	91	91
UV transmittance (280–380)	ISO EN 410	%	88.6	87.7	87.3	85.3
Haze (@23°C)	ASTM D1003	%	0.15	0.15	0.15	0.15
Refractive index (@23°C)	ISO 489		1.53	1.53	1.53	1.53
Glass transition temperature T_g (10 K/min)	ISO 11357	°C	142	142	142	142
Max. water absorption (@23°C)	ISO 62	%	0.01	0.01	0.01	0.01
Surface energy (@23°C)	AN-SOP 1827	mN/m	34.4	34.4	34.4	34.4
Tensile strength	ISO 527-3	MPa	67	64	61	59
Nom. strain at break	ISO 527-3	%	2.2	2.5	2.5	2.5
Tensile stress at break	ISO 527-3	MPa	-	-	-	-
Specific gravity	IOS 1183	g/cm³	1.01	1.01	1.01	1.01

POLYVANTIS
Sanford LLC

1796 Main Street
Sanford, Maine 04073
USA

www.polyvantis.com
www.acrylite.co



Distributed by:



www.polymershapes.com

Film East: Tyngsboro, MA | (978) 926-0021

Film Central: Naperville, IL | (331) 204-0272

Film West: Fresno, CA | (559) 383-3456

Film Canada: Dorval, QC | (514) 442-1048

Film Mexico: Apodaca, MX | +52-81-8369-4688

® = registered trademark

EUROPLEX is a registered trademark of POLYVANTIS GmbH, Germany.

Certified to DIN EN ISO 9001 (Quality) and DIN EN ISO 14001 (Environment)

This information and all further technical advice is based on our present knowledge and experience. Such information or advice, whether given at Buyer's request or not, implies no liability or other legal responsibility on our part, including with regard to existing third-party intellectual property rights. In particular, no warranty, whether expressed or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technical progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products should be used.